

POWER GENERATION

G-Drive
S8000

S8000

31 kWm @ 1500 rpm

Unregulated


SPECIFICATIONS

Certification		Unregulated
No. of cylinders		3L
Injection System		M
Air Intake		NA
Displacement	liters	2.9
Exhaust System		-
Stand-by Power @ 1500 rpm	kWm	31
Prime Power @ 1500 rpm	kWm	28
Stand-by Power @ 1800 rpm	kWm	34
Prime Power @ 1800 rpm	kWm	31
Code		S8000AM1

WEIGHT AND DIMENSIONS

Dimensions (L x W x H)	mm	962 x 630 x 947
Dry Weight	Kg	351

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS

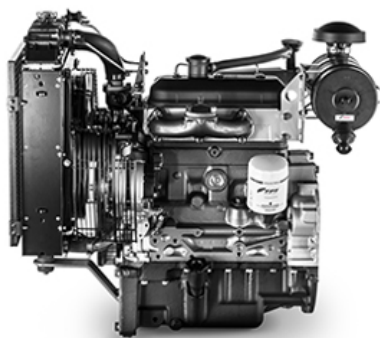

IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

Do you want to know more?



LEGEND

Arrangement

L (in line)
V (90° "V" configuration)

Air Handling

TCA (Turbocharged with aftercooler)
TC (Turbocharged)
NA (Naturally Aspirated)

Injection System

M (Mechanical)
ECR (Electronic Common Rail)
EUI (Electronic Unit Injector)
MPI (Multi Point Injection)

MORE INFORMATION ABOUT CONFIGURATIONS AND ACCESSORIES AVAILABILITY, THROUGH THE WORLDWIDE FPT INDUSTRIAL DISTRIBUTORS NETWORK

NOT ALL MODELS, STANDARD EQUIPMENT AND ACCESSORIES ARE AVAILABLE IN ALL COUNTRIES. SPECIFICATIONS AND OPTIONS MAY CHANGE WITHOUT NOTICE

